


VacDry VK3.0S: Specifications

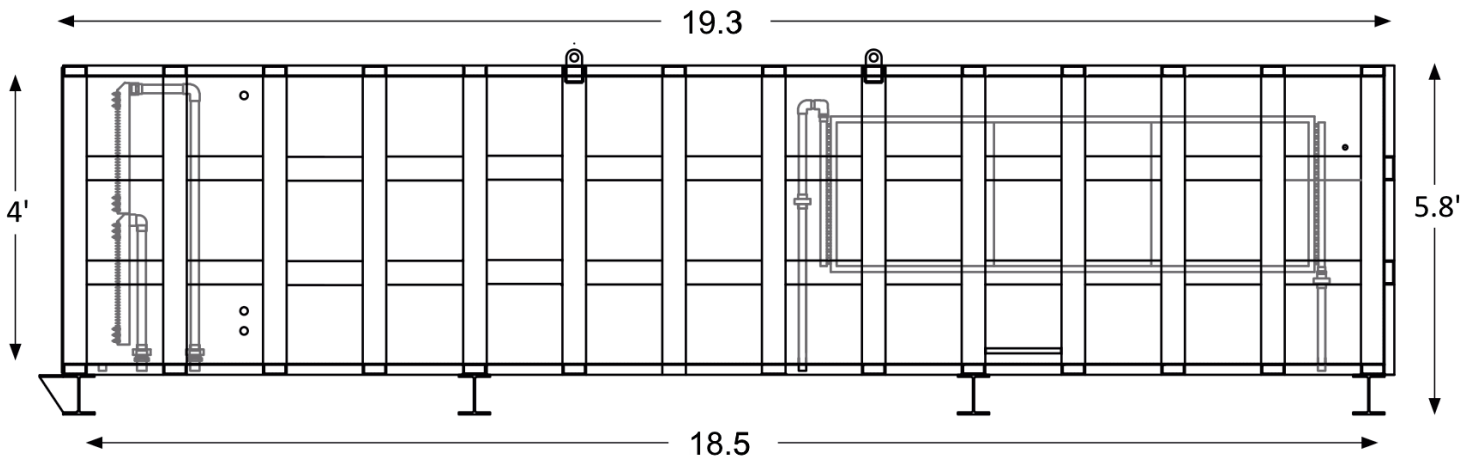

Projections w/ 8/4 Hard Maple

Layers per Load	16
Max. Boardfeet Capacity	~2241
Boardfeet @ 80% Coverage	~1793
Drying Time	7 Days
Loads per Month	~4
Boardfeet per Month	~7,321
Boardfeet per Year	~87,852

Requirements w/ 8/4 Hard Maple

Avg Electric Usage per Hour	~4.9 kW
Electric Usage per Load	~822 kW
Electric Cost @ \$0.11/kWh	~\$90
Avg BTU per Hour	~19,951 BTU
MBTU per Load	~3.4 MBTU
BTU Cost @ \$2.70/gal	~\$77

Specifications

Kiln Charge Size:	50"W x 42"H x 17'L
Floor Space Required:	~6'W x ~38'L
Shipping Weight:	~14,000 Pounds
Service Entrance:	20A @ 460VAC

